




3HE 12x HDD Rack shelf with Fans / 12x Festplattenrack mit Lüfter

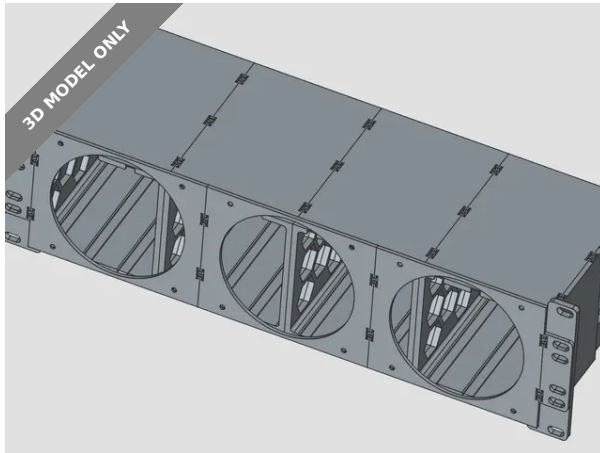

Rego

[VIEW IN BROWSER](#)

updated 10. 5. 2025 | published 10. 5. 2025

Summary

HDD Enclosure Rackmount / Festplattengehäuse für 19" Rack

[Gadgets](#) > [Computers](#)

Tags: [hdd](#) [harddisk](#) [server](#) [19inch](#) [hddenclosure](#)
[19inchrackmount](#)

Hello,

I have built a new version of my hard disk shelf.

First of all I would like to thank @JorySharr_2146962 for the idea and the constructive criticism during the design.

A total of 12 hard disks can now be installed. These are locked in the respective slot with the handle. The following parts are required for the complete print:

4x hard disk enclosure
1x rack bracket left

1x rack bracket right
12x handles
24x pins
3x 120mm fan bracket
2x rack fan bracket
34x connectors

Print:

PETG with 3 walls, top and bottom
30% infill should be enough for the hard disk enclosures
50% infill for the rack mounts
10% should be enough for the rest
Supports are only necessary for the handles

Assembly:

Assemble the four hard disk housings with the connectors at the top and bottom. These should be pressed in with the end of a screwdriver, for example. Attach the respective rack mounts on the left and right with the same technology.

In the server rack, the top, bottom and the two holes in the middle of the 3U space must now be fitted with rack nuts. Then screw the housing into the rack, using screws at the top and bottom.

Install and wire all hard disks. Then assemble the fan brackets and the rack brackets provided with the connectors and screw on the fans. Finally, the entire fan bracket only needs to be screwed in front of the hard disks.

Hallo,

ich habe eine neue Version meines Festplattenshelfs gebaut.

Als erstes gilt hier mein Dank an @JorySharr_2146962 für die Idee und die konstruktive Kritik während des Entwurfs.

Es können nun insgesamt 12 Festplatten eingebaut werden. Diese werden mit dem Griff im jeweiligen Slot arretiert. Für den vollständigen Druck werden folgende Teile benötigt:

4x Festplattengehäuse
1x Rack-Halterung links
1x Rack-Halterung rechts
12x Griff
24x Pin
3x 120mm Lüfter-Halterung
2x Rack-Lüfter-Halterung
34x Verbinder

Druck:

PETG mit 3 Wänden, Top und Boden

30% Infill sollten bei den Festplattengehäusen reichen

50% Infill für die Rack-Halterungen

10% sollte für den Rest reichen

Supports sind nur bei den Griffen nötig

Zusammenbau:

Die vier Festplattengehäuse mit den Verbindern oben und unten aneinander bauen. Diese sollten z.B. mit dem Ende eines Schraubendrehers eingedrückt werden. Links und rechts die jeweiligen Rack-Halterung mit der selben Technik anbauen.

Im Server-Rack müssen nun im 3HE-Platz jeweils die oberen, unteren und die beiden Löcher in der Mitte mit Rack-Muttern versehen werden.

Anschließend das Gehäuse ins Rack schrauben und dabei oben und unten Schrauben verwenden.

Alle Festplatten einbauen und verkabeln. Anschließend die Lüfterhalterungen und die dafür vorgesehenen Rackhalterungen mit den Verbindern zusammenbauen und die Lüfter anschrauben. Abschließend muss die gesamte Lüfterhalterung nur noch vor die Festplatten geschraubt werden.

Model files

**enclosure.stl**

📄 print 4x

**rackmount_left.stl**

📄 print 1x

**rackmount_right.stl**

📄 print 1x

**handle.stl**

📄 print 12x



pin.stl

📄 print 24x




fan_bracket.stl

📄 print 3x



rackmount_fan.stl

📄 print 2x



connector.stl

📄 print 34x

License ©



This work is licensed under a
[Creative Commons \(4.0 International License\)](#)

Attribution—Noncommercial—Share Alike

- ✗ | Sharing without ATTRIBUTION
- ✓ | Remix Culture allowed
- ✗ | Commercial Use
- ✗ | Free Cultural Works
- ✗ | Meets Open Definition